



CLAY PAVING BRICKS



Cederberg, Champagne and Burgundy Pavers



Tuscan Blend Pavers

CLAY BRICK PAVERS

For both beauty and durability underfoot, Corobrik hard burnt clay brick pavers offer aesthetic appeal as well as great practicality. Every paver is originated with clay drawn from age old deposits, exuding its own earthy personality. Corobrik's distinctive range spans an extensive palette of colours and textures, offering an excellent spectrum for all tastes and lifestyles.

The Corobrik paving range is designed to complement corresponding face brick ranges and may be laid in many attractive angular and radial patterns.



CHAMPAGNE PAVER PA (SABS 1575:2007)
 (ISO 9001:2008)
 220 x 108.5 x 50mm/200 x 98.5 x 65mm
 (Chamfered and Nibbed). Available in special shapes and bullnose. Springs Factory – Gauteng



CHAMPAGNE PIAZZA PAVER PA
 210 x 60 x 60mm
 (Chamfered)
 Springs Factory – Gauteng



CEDERBERG PAVER PA (SABS 1575:2007)
 (ISO 9001:2008)
 220 x 108.5 x 50mm/200 x 98.5 x 65mm
 (Chamfered and Nibbed). Available in special shapes and bullnose. Springs Factory – Gauteng



CEDERBERG PIAZZA PAVER PA
 210 x 60 x 60mm
 (Chamfered)
 Springs Factory – Gauteng



NAMAQUASTONE PAVER PB
 220 x 108.5 x 50mm
 (Nibbed)
 Springs Factory – Gauteng



BURGUNDY PAVER PA (SABS 1575:2007)
 (ISO 9001:2008)
 220 x 108.5 x 50mm/200 x 98.5 x 65mm
 (Chamfered and Nibbed). Available in special shapes and bullnose. Springs Factory – Gauteng



BURGUNDY PIAZZA PAVER PA
 210 x 60 x 60mm
 (Chamfered)
 Springs Factory – Gauteng



TUSCAN BLEND PAVER PA (SABS 1575:2007)
 (ISO 9001:2008)
 220 x 108.5 x 50mm/200 x 98.5 x 65mm
 (Chamfered and Nibbed). Available in special shapes and bullnose. Springs Factory – Gauteng



NUTMEG PAVER PA (SABS 1575:2007)
 (ISO 9001:2008)
 220 x 108.5 x 50mm/200 x 98.5 x 65mm
 (Chamfered and Nibbed). Available in special shapes and bullnose. Springs Factory – Gauteng



IRONSTONE PAVER PB
 220 x 108.5 x 50mm
 (Nibbed)
 Springs Factory – Gauteng



CAPE STORMBERG PAVER PB
 200 x 98.5 x 65mm
 Available in special shapes
 Phesantekraal Factory – Western Cape




ONYX PIAZZA PAVER PA
 210 x 60 x 60mm
 (Chamfered)
 Springs Factory – Gauteng

CLAY PAVING

BOND PATTERNS

- Herringbone bond is recommended for areas with vehicular traffic.
- Other bonds may be used for pedestrian traffic.

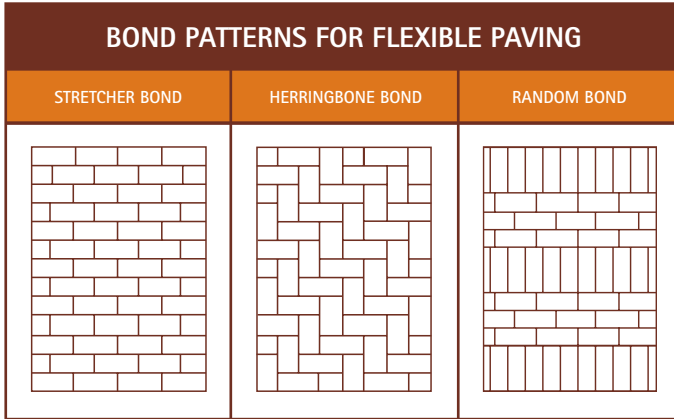

CLAY PAVING QUANTITIES

| VARIOUS PAVER SIZES (mm) LENGTH x WIDTH x DEPTH | APPROXIMATE USAGE (Qty/m ²) | | AREA PER 1000 PAVERS | |
|----------------------------------------------------|-----------------------------------------|-------------------------------|---------------------------------|-------------------------------|
| | Flexible (assumes 3mm joint) | Rigid (assumes 10mm joint) | Flexible (assumes 3mm joint) | Rigid (assumes 10mm joint) |
| 220 x 108.5 x 50 | 41 | 36 | 25m ² | 27m ² |
| 220 x 98.5 x 65 | 48 | 43 | 21m ² | 23m ² |
| 200 x 98.5 x 50 | 48 | 43 | 21m ² | 23m ² |
| 222 x 73 x 106 (brick on edge) | 61 | 52 | 16m ² | 19m ² |
| 210 x 60 x 60 | 75 | 65 | 13m ² | 15m ² |

Every effort has been made in the photographic, reproduction and printing process to feature a portrayal of each panel as it would appear in real life. However, the only accurate way to assess the true aesthetic appeal of face brick is to view the product.

www.corobrik.com | info@corobrik.co.za

Gauteng: (011) 871 8600 | Durban: (031) 560 3111 | Stellenbosch: (021) 888 2300

